


# **WARNING:**


CHOKING HAZARD-Small parts. Not for children under 3 years.

Thank you for purchasing the Playskool® Cool Tools® Motorcycle! Includes: Motorcycle frame, front and back wheels, left and right engine halves, seat, passenger seat, saddle bags, handlebars, dipstick, 5 screws, Cool Tools® Lug Wrench and label sheet. With the Cool Tools® Motorcycle, the assembly is part of the play! The cycle has 8 removable parts and 5 screws you can use with your Cool Tools® to assemble or disassemble parts, over and over again! NOTE TO PARENT: Remove pieces from plastic bags and discard the bags before giving toy to your child.

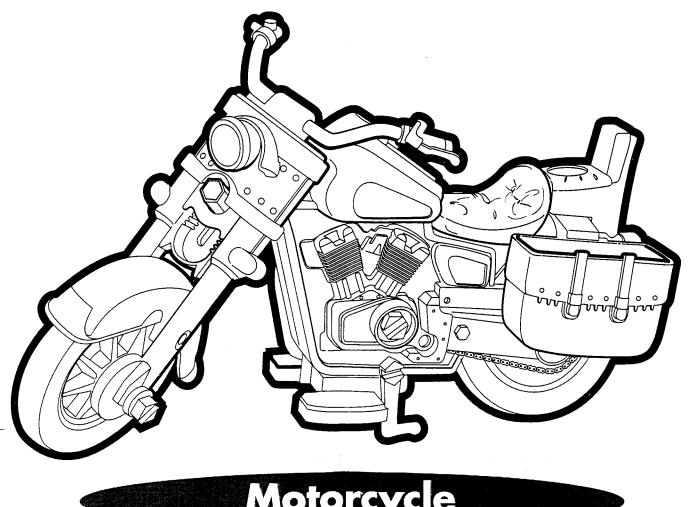


Motorcycle

# WHEEL ASSEMBLY:

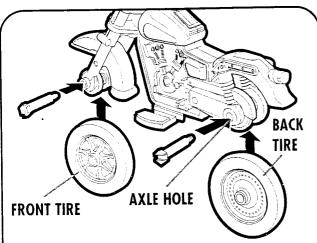


1. As shown in illustration, the front wheel has open spokes and the back wheel has a solid spoke. To assemble either wheel, line up the hole in hub of wheel with the axle hole, and use either of the 2 large axle screws to secure the wheel onto the axle. The axle screws must be attached from the left side (from the perspective of someone sitting on the motorcycle).

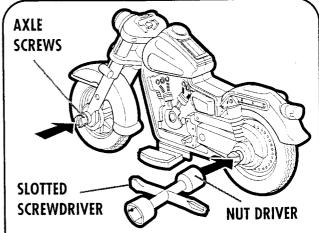


2. Tighten the axle screws using the 4-in-1 Cool Tools® Lug Wrench. Of the 4 bits on the tool, you can use either the slotted screwdriver or the 11 mm nut driver for this step. (The 2 nut drivers on the tool are 11 mm and 13 mm.)

#### **ENGINE ASSEMBLY:**

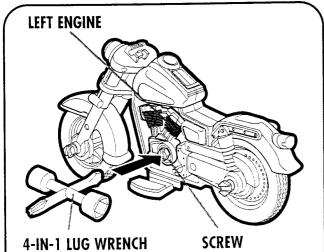


3. Assemble the right and left engine halves as shown, securing each half with either of the 2 smaller gray screws. Tighten the screws with the Lug Wrench, using either the slotted screwdriver or the 11 mm nut driver.

# **HANDLEBARS:**

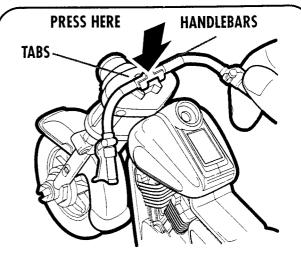


4. Line up tabs on handlebars with slots in fitting and hold the handlebars as shown. Press down at the center and firmly rock the handles from side to side until the handlebars snap firmly into place. If you have difficulty with this step, ask your mom or dad to help you!

#### **DIPSTICK:**

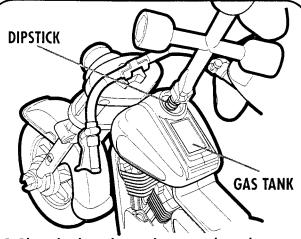


5. Place the dipstick into the gas tank as shown, screwing it into position with the slotted screwdriver.


# **SEAT/SADDLE BAG ASSEMBLY:**

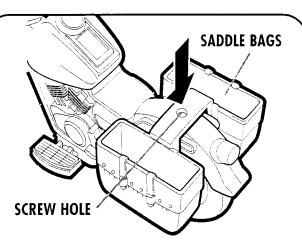

6. The saddle bags, driver seat and passenger seat are all part of one assembly. First, place the saddle bags into their slot above back wheel as shown, lining up screw hole on saddle bags with screw hole on motorcycle.

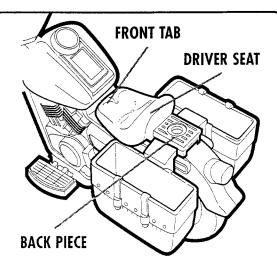


7. Now, slide the driver seat into place, pressing the tab in front of seat into the slot in back of gas tank. The back piece of driver seat should fit over saddle bags, and the 3 screw holes (on seat, saddle bags and motorcycle) should all line up.

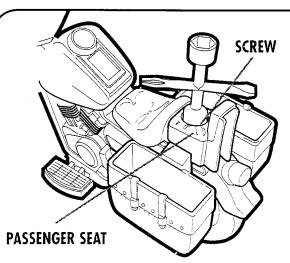


8. Finally, place the passenger seat over back piece of driver seat. Secure the assembly with the 1 black screw included, tightening the screw with the 11 mm nut driver as shown. Please note: The driver's seat must be attached to motorcycle to prevent the black screw from interfering with the movement of the rear wheel.

# **APPLYING THE LABELS:**

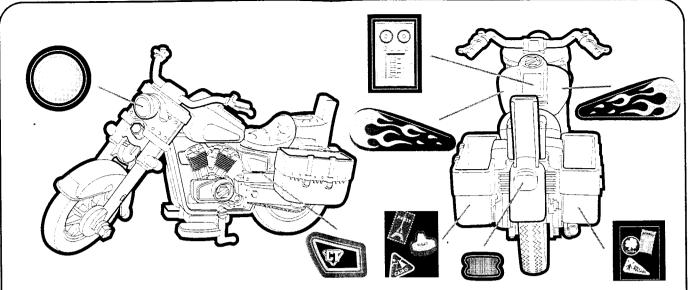


9. Now your assembly is complete! To decorate your motorcycle, peel and apply the labels to the assembled cycle as shown.

# **ADDITIONAL FEATURES:**

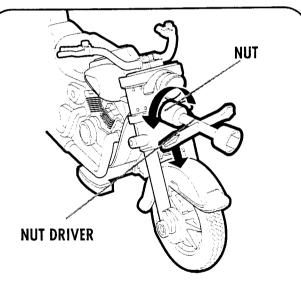

10. Just below the front headlight of the motorcycle is a nut for extending the front end into a "chopper"- style cycle! To extend the front wheel outwards, use the small-headed nut driver to turn the nut counter-clockwise as shown; turn the nut clockwise to bring the front end back in.

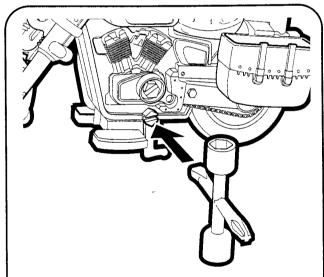

11. To stand in place, the motorcycle also features a kick stand. Use the slotted screwdriver or the 11 mm nut driver to pivot the kickstand into place as shown.