



DIG'N GO CONSTRUCTION


THE PORTABLE OUTDOOR PLAYSET!

Ages 3 & Up

CAUTION: This product contains small parts which are necessary for assembly. Prior to and during assembly of this product, keep small parts out of children's reach. Small parts pose a choke hazard to children under 3 years.


Adult assembly required. Hammer and Phillips screwdriver required for assembly (not included). Sand not included.

INCLUDES: Dump Truck, Shovel Arm, Shovel Arm Scoop, Gripper Claw (2 pieces) and Lift (2 pieces), Drain Pipe, 4 Guardrails, 2 Retainer Walls, Sand Sifter Bridge, Sand Hopper, Dinosaur "fossil", 3 Construction Cones, Storage Panel (2 pieces), 2 Wheels, 2 Wheel Inserts, Axle, 2 Axle Sleeves, 9 Screws, 2 push nuts, push nut tool and label sheet. Remove all parts from frames and use safety scissors to trim excess plastic (if necessary) from each piece.

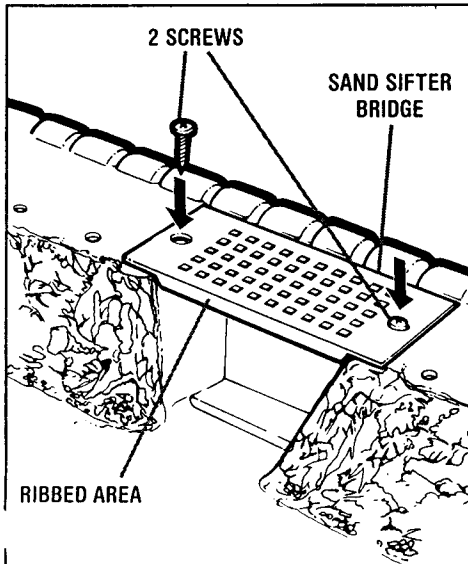


SAND SIFTER BRIDGE

1. Fit sand sifter bridge into position shown with ribbed area facing out. Using a Phillips screwdriver, secure bridge into place with two of the included screws.

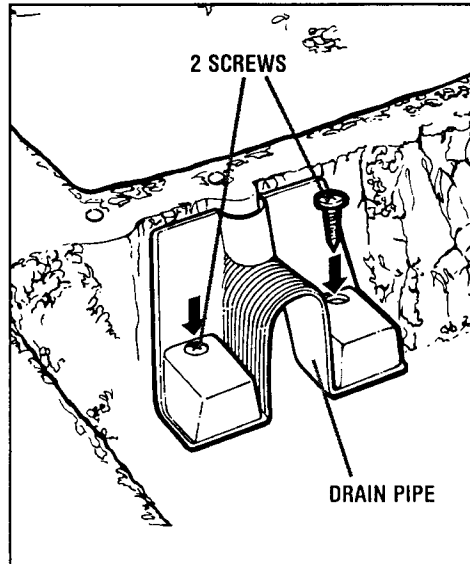


DRAIN PIPE

2. Fit drain pipe into position shown. Using a Phillips screwdriver, secure in place with two of the included screws.

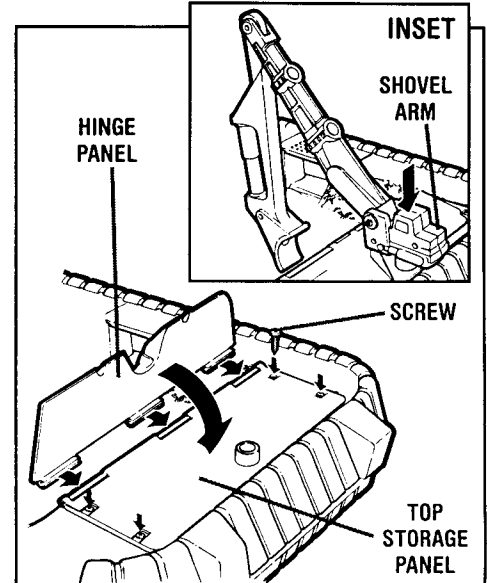


STORAGE PANEL

3. Fit top of storage panel into position shown. Using a Phillips screwdriver, secure panel into place with five of the included screws. Snap hinge panel into place as shown. Hinge panel is designed to open and close to store sand and accessories. Fit shovel arm into hole as shown (inset).

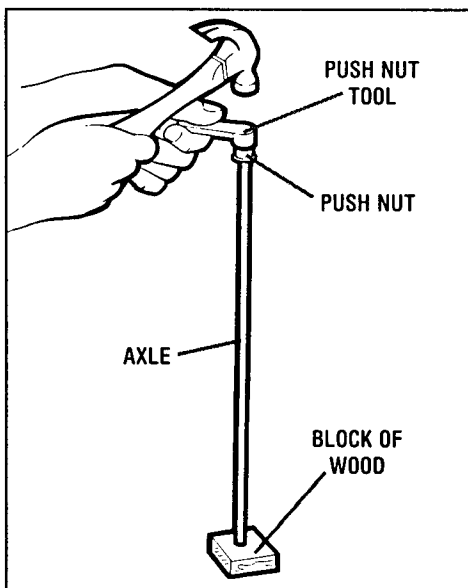


AXLE/WHEEL ASSEMBLY

4. Fit push nut onto one end of axle. Place push nut tool over push nut, then use a hammer to secure onto one end of axle. (NOTE: To prevent floor damage when using hammer, we recommend placing the opposite end of axle on a small block of wood or other protective surface before hammering.)

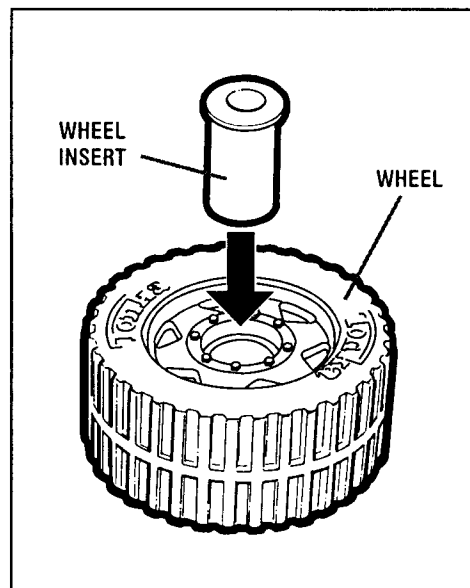


AXLE/WHEEL ASSEMBLY CONT.

5. Push wheel insert into wheel with rim facing out as shown. Repeat with other wheel.

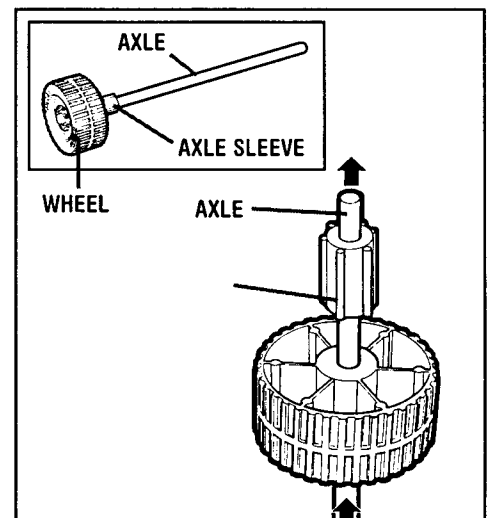


AXLE/WHEEL ASSEMBLY CONT.

6. Slide end of axle (without the attached push nut) all the way through wheel, wheel insert and through axle sleeve.

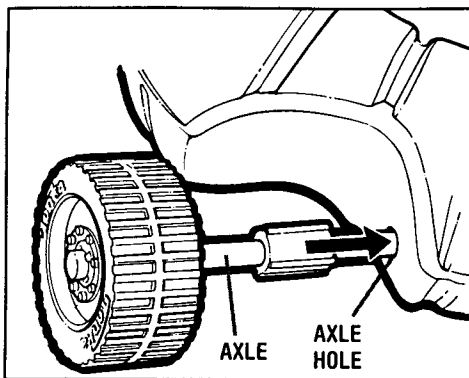

AXLE/WHEEL ASSEMBLY CONT.


7. Push axle through axle hole and continue pushing all the way through the opposite end.

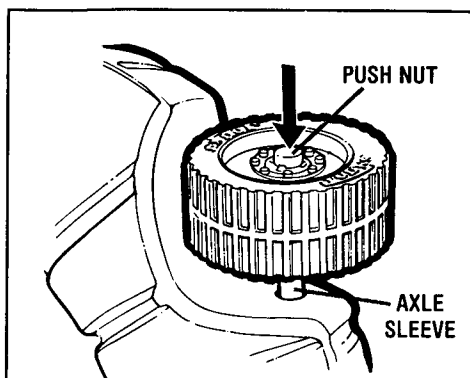

AXLE/WHEEL ASSEMBLY CONT.


8. Slide the other axle sleeve over end of axle, then slide the other wheel (with wheel insert) over end of axle as shown. Hold product on its side and secure wheel in place with push nut as instructed in Step #4.

(We recommend placing the opposite wheel on a small block of wood or other protective surface before hammering.)

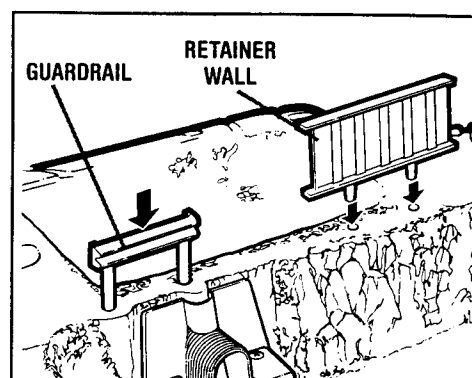


GUARDRAILS/RETAINER WALLS

9. The four guardrails and two retainer walls can be inserted and removed from holes as shown.

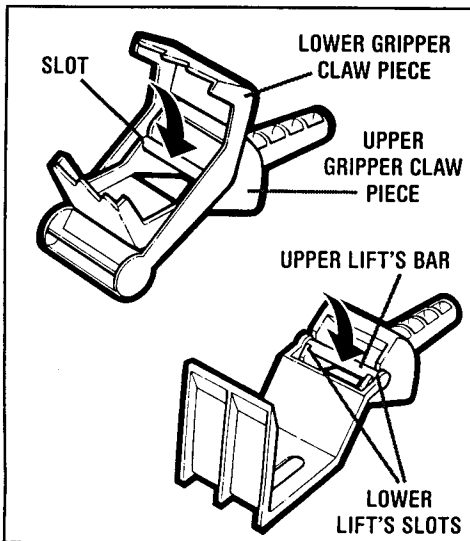


GRIPPER CLAW/LIFT

10. Guide the upper gripper claw piece through the lower gripper claw piece and snap slots onto the lower gripper claw bar. Snap the lower lift's slots onto the upper lift's bar as shown.

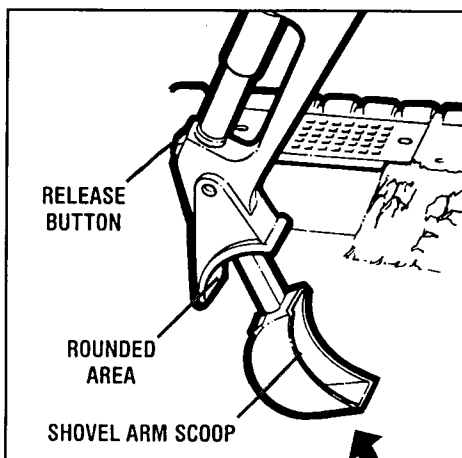


SHOVEL ARM

11. The handles of the gripper claw, lift and shovel arm scoop all fit into the hole at end of shovel arm. Make sure the rounded areas of each piece match the rounded area of shovel arm before inserting. To remove each piece, press release button and pull piece out. Each piece can also be used as a hand-held accessory!

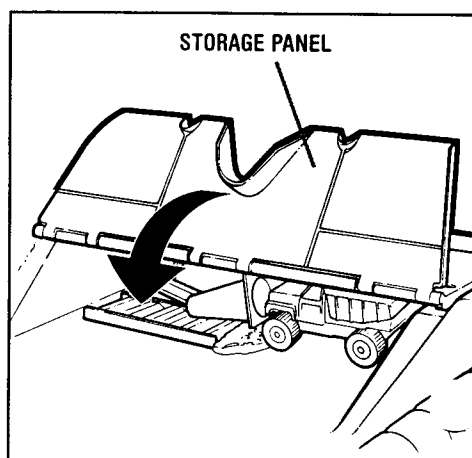


STORAGE & PORTABILITY

12. Fit the dump truck, guardrails, retainer walls, dinosaur "fossil" and construction cones under the storage panel and close panel. (Sand can also be stored here.)

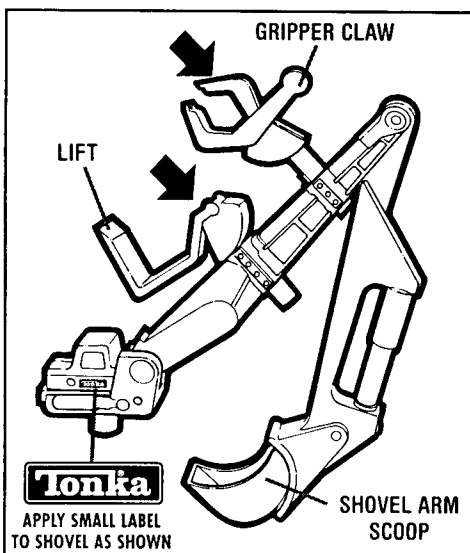

STORAGE & PORTABILITY CONT.

13. With the shovel arm scoop inserted into the shovel arm, fit the handles of the gripper claw and lift into holes in shovel arm as shown.

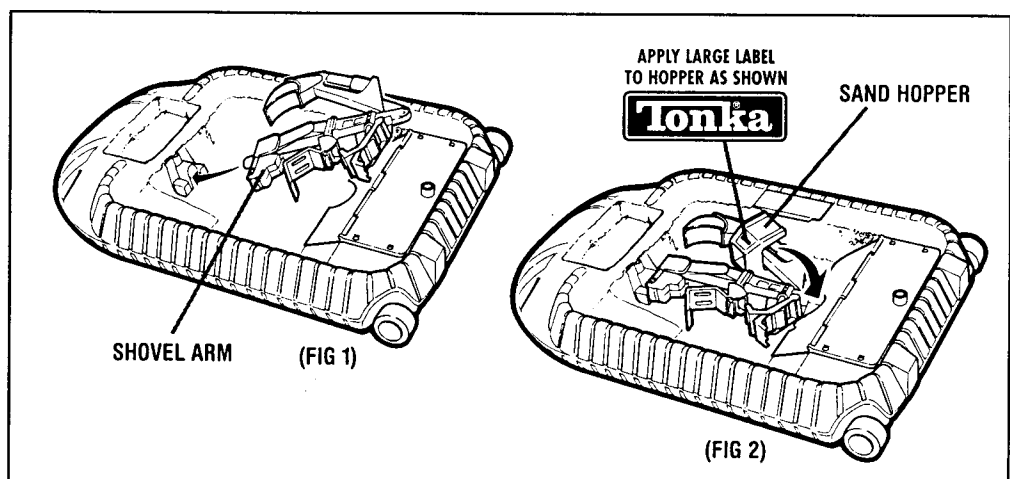

STORAGE & PORTABILITY CONT.

14. Fit the end of shovel arm into drain pipe as shown (FIG 1), then guide the shovel arm below storage panel until it's secured in place (FIG 2). The sand hopper fits under shovel arm. Now you're ready to roll!